


Bluetooth Remote Control Manual Instruction A1

iLintek

Bluetooth remote control A1

1. Bluetooth remote control specific data :

- 1.1 Dimension : 110*52*22 mm(L*W*H) .
- 1.2 Power supply : Two pieces AAA cell (1.5V*2) .
- 1.3 Control distance : Above 20 metres .
- 1.4 Control devices : iLintek Bluetooth MESH smart devices.

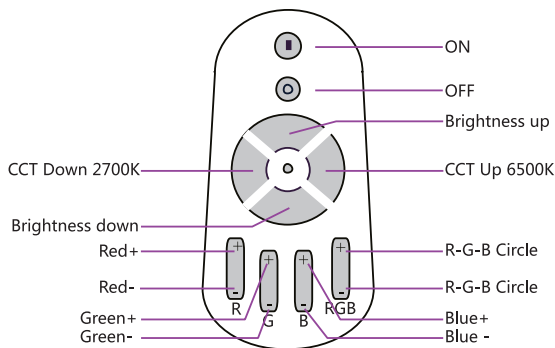

2. Bluetooth remote control pair the smart light operation method:

- 2.1 Bluetooth remote control can directly control the factory setting products under the name: Mesh, password: 123.
- 2.2 If the account and password of the Bluetooth remote control and light are different, users need to set up as below:
 - 2.2.1 Set new user name and password, e.g. user name: Ashley, password: 123, then log in.
 - 2.2.2 Press the B+ and ON button at the same time for 15 seconds. Indicator light start flashing, the remote control enters into setup mode.

2.2.3 In App, press “+” , which in the bottom right corner of the first page. Press the useless light icons which will become grey afterwards. Leave the necessary yellow icons then press “Add all” to finish binding. Lastly, press any button of remote control to exit setting mode.

3. Bluetooth remote control restore to factory setting:

Press the G- and ON button at the same time for 15 seconds. If the indicator light flashes, the remote control successfully restore to factory setting.

4. Caution :

- 4.1 Remove the batteries when remote control is not in use for extended period.
- 4.2 The remote control does not response when press the button of controller. Please check the battery power whether runs out or replace new batteries.
- 4.3 Once the remote control is reset to setting mode, don't press any button, otherwise remote control will exit the setting status and mobile phone pair action failed.
- 4.4 If forget the account information of the light and remote control, please reference 2.4.1 and Mesh light instruction manual.



Download APP